


RG 6/U-4 Cu/CuSn TRISHIELD



KULLANIM ALANLARI

Bina içi CATV-CCTV sistemlerinde dağıtım kablosu ve düşük zayıflama istenen uydu sistemlerinde bağlantı kablosu olarak kullanılır.

APPLICATION

It is used as a distribution cable for indoor CATV, CCTV systems and as a connection cable for satellite systems where lower attenuation is required.

KABLO YAPISI

1-İletken	1,02 mmØ ELEKTROLİTİK MONO BAKIR
2-Yalıtkan	4,60 mmØ FİZİKSEL KÖPÜK PE
3-1.Ekran	AL-PES BANT (%100 KAPAMA)
4-2.Ekran	KALAYLI BAKIR ÖRGÜ
5-3.Ekran	AL-PES BANT (%100 KAPAMA)
6-Kılıf	7 mmØ PVC KOMPAUND BEYAZ
7-Toplam Ağırlık	54 kg/km
8-Standart Uzunluk	100/500/1000/2000 mt

CONSTRUCTION


1-Conductor	1,02 mmØ ELECTROLYTIC SOLID COPPER
2-Insulation	4,60 mmØ PHYSICAL FOAM PE
3-1.Screen	AL-PES TAPE (100% COVERAGE)
4-2.Screen	TINNED COPPER BRAID
5-3.Screen	AL-PES TAPE (100% COVERAGE)
6-Sheath	7 mmØ PVC COMPOUND WHITE
7-Total Weight	54 kg/km
8-Standard Length	100/500/1000/2000 m

TEKNİK ÖZELLİKLER

TECHNICAL CHARACTERISTICS

YALITIM DİRENCİ INSULATION RESISTANCE	EFEKTİF KAPASİTE MUTUAL CAPACITANCE	YAYILMA HIZI VELOCITY OF PROPAGATION	ÇALIŞMA VOLTAJI OPERATING VOLTAGE	TEST VOLTAJI TEST VOLTAGE	BÜKÜLME YARICAPI BENDING RADIUS	ÇALIŞMA SICAKLIĞI TEMPERATURE RANGE	EMPEDANS IMPEDANCE	ALEV GEÇİKTİRİCİLİK TESTİ FLAME RETARDANT TEST
>2000 MΩxkm	53±2 pF/m	82 %	1,3 kV	3 kV	20x D mm	- 40°C +70°C	75±3 Ω	IEC 60332-1-2 VDE 0482-332-1-2 EN 60332-1-2

ELEKTRİKSEL ÖZELLİKLER ELECTRICAL CHARACTERISTICS

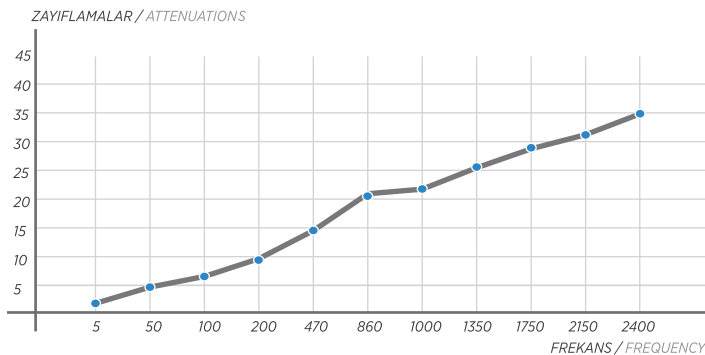

ZAYIFLAMALAR (20°C) ATTENUATIONS (20°C)

MHz	5	50	100	200	470	860	1000	1350	1750	2150	2400
dB/100 m	2	4,9	7	9,5	14,7	20,5	21,7	25,6	29,1	31,4	35